

1 Prepare the speakers
See below

➔ **2 Place the speakers**
See below

➔ **3 Connect the cables**
See over

➔ **4 Turn on the main unit**
See over

➔ **Smart setup**
See Smart setup screen

1 Prepare the speakers

e.g.,



The diagram illustrates the location of the rear seat area. A side view of a vehicle is shown on the left, with a callout line pointing to a top-down view of the rear seat area. The top-down view shows a rectangular area with four circular markers at the corners and a central oval marker labeled 'A'.

Step 1

Back of the base

Pull the cable straight along the line and slide into the groove.

2

3 Tighten securely.

Front/surround speaker

Stand

Base

Step 2

4 Leave about 80 mm

6 Insert the wire fully, taking care not to insert beyond the wire insulation.
 +: White
 -: Blue line

PUSH!


7 Press into the groove.

5 Tighten securely.


Label each speaker cable by attaching the numbered sticker at the position indicated in the illustration. Be sure to match the number on each sticker with the circled number in the illustration.

Connect the speaker cables.
Insert the wire fully, taking care not to insert beyond the wire insulation.

+: White
-: Blue line

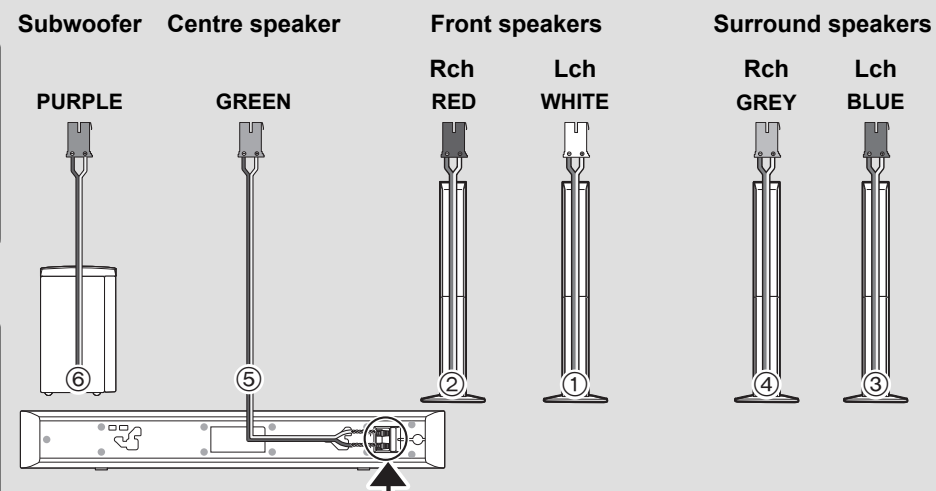

2 Place the speakers

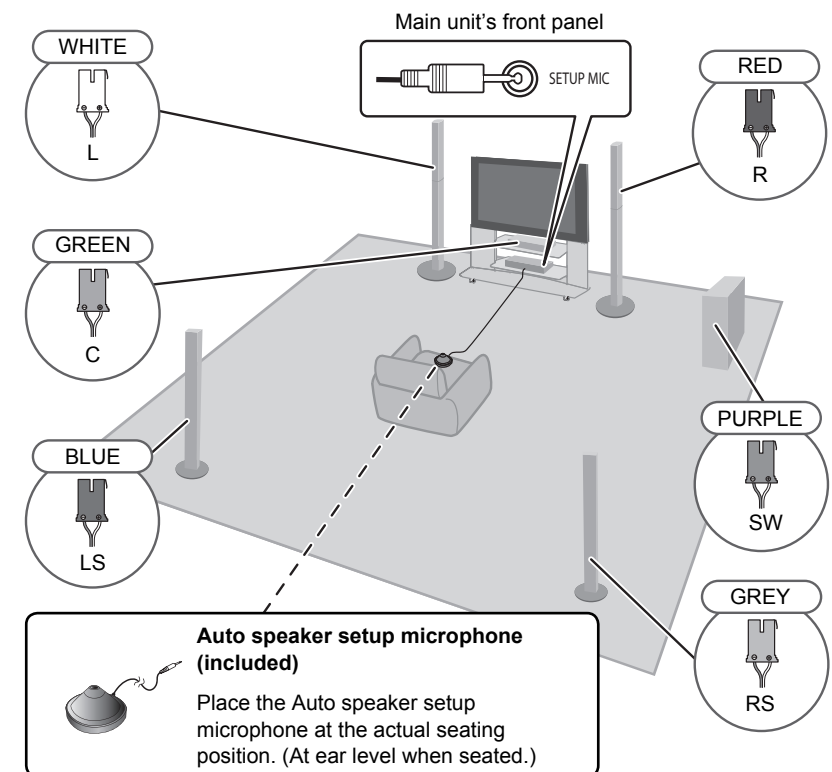


The diagram illustrates the difference between Front speakers (L, R) and Surround speakers (LS, RS). On the left, under the heading "Front speakers (L, R)", a top-down view shows a listener at the bottom with two speakers positioned at a 60-degree angle from each other and from the listener. On the right, under the heading "Surround speakers (LS, RS)", a side view shows a listener in the center with two speakers positioned at a 120-degree angle from each other, with a central speaker unit above them.

3 Connect the cables

For detailed information, refer to the operating instructions.

Connect the cables by colour or by the numbers indicated in the illustration to the appropriate terminals on the rear panel of the unit.

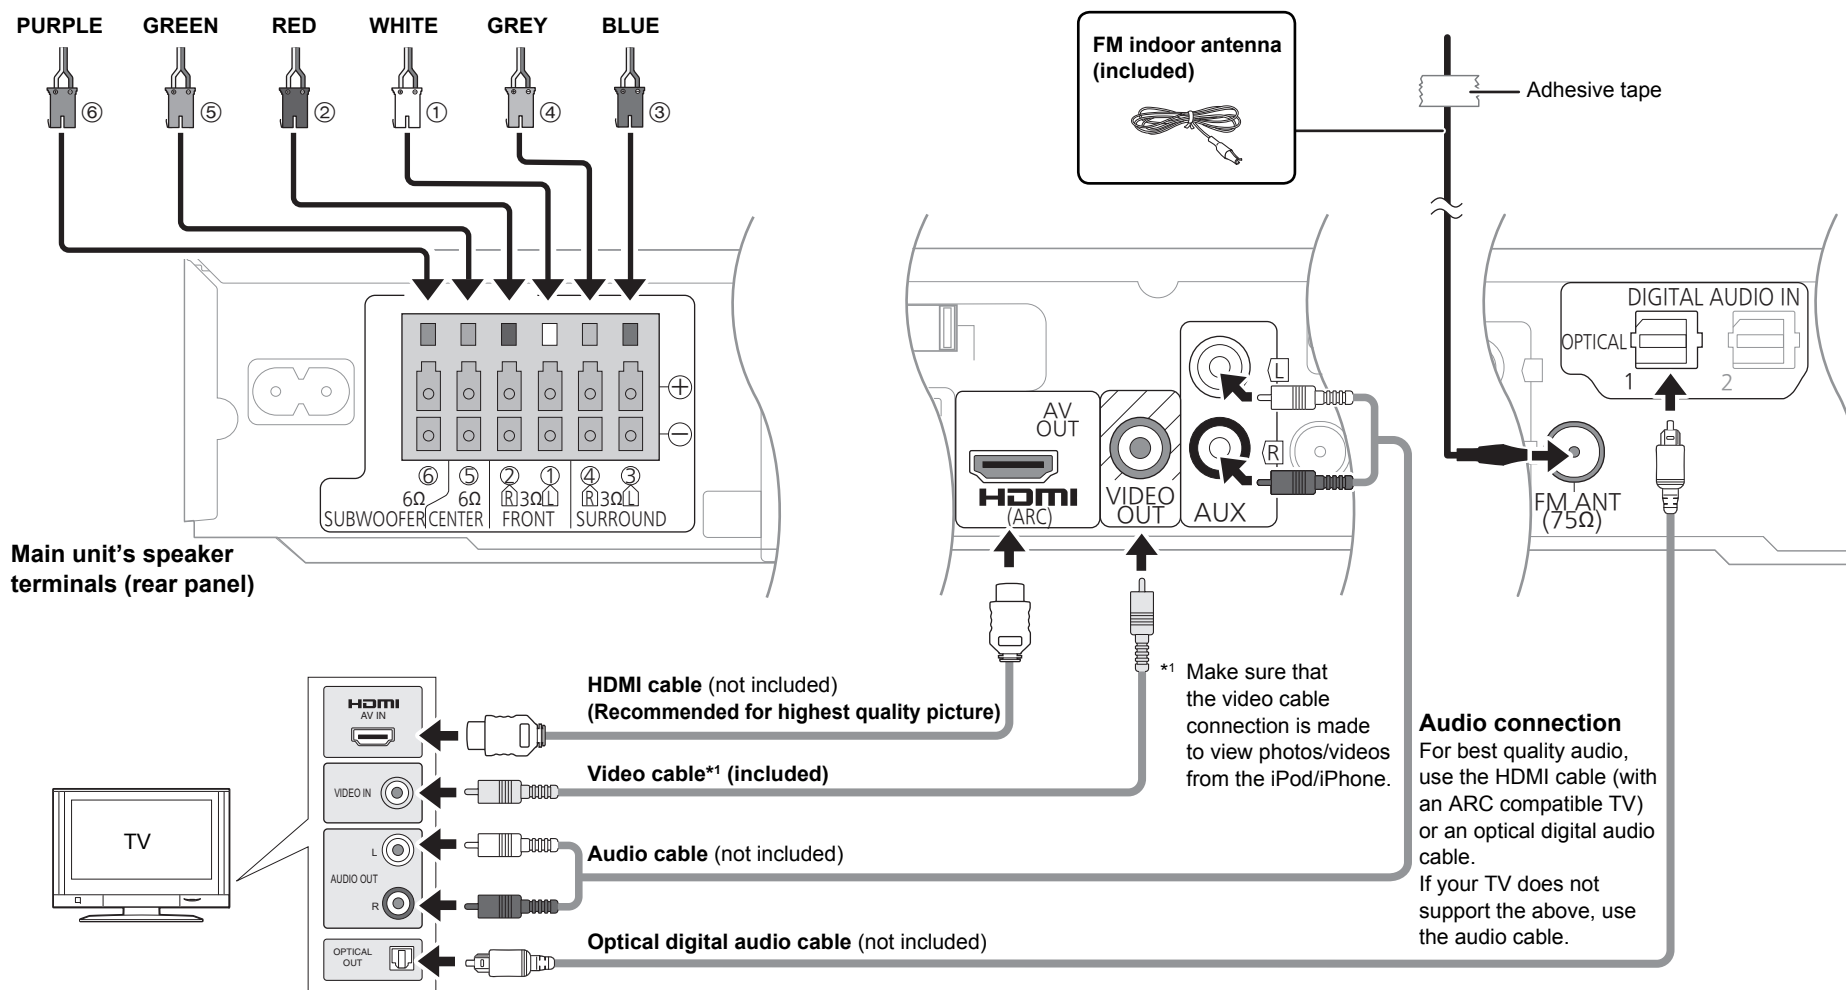

Audio connection
For best quality audio, use the HDMI cable (with an ARC compatible TV) or an optical digital audio cable. If your TV does not support the above, use the audio cable.


Other connection

Broadband Network Connections (Optional)

By connecting this unit to the network, you can use the BD-Live and VIERA CAST*2 features.

*2 South East Asia only


Main unit

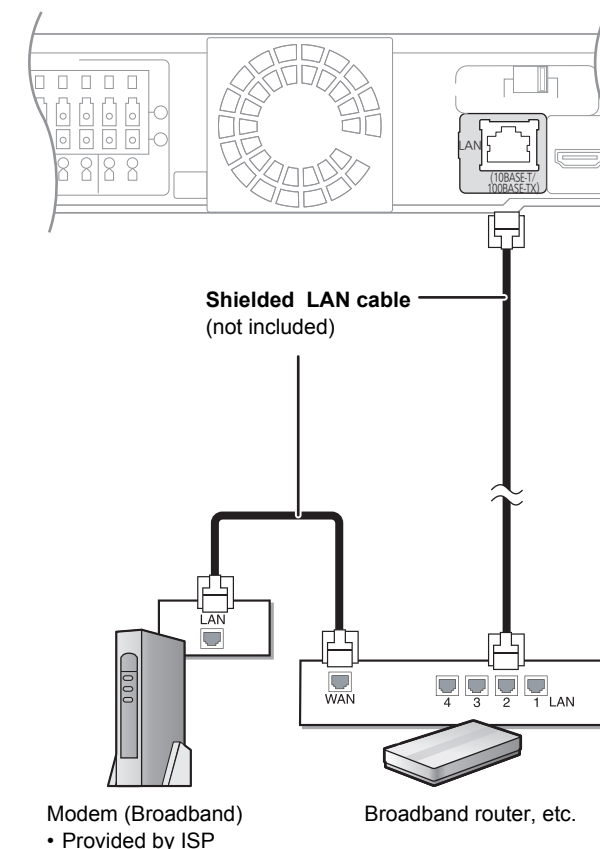

4 Turn on the main unit


1 Connect the AC mains lead

Connect the AC mains lead to the main unit before connecting to the household mains socket.

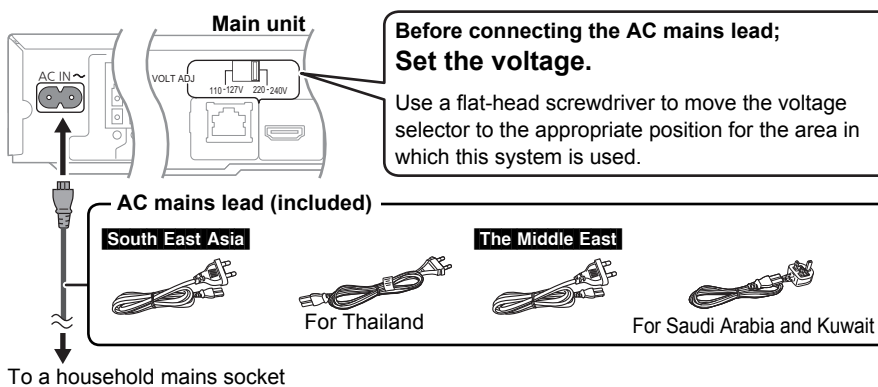

2 Turn on the TV


Turn on your TV and select the appropriate video input mode (e.g., VIDEO 1, AV 1, HDMI, etc.) to suit the connections to this unit.

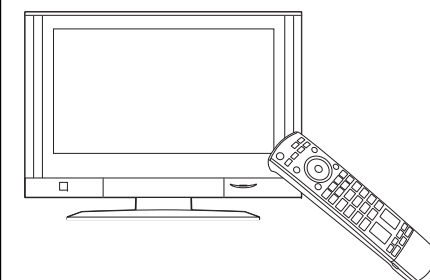

3 Turn on the main unit


Press [] to turn on the main unit.

Installing batteries in the remote control

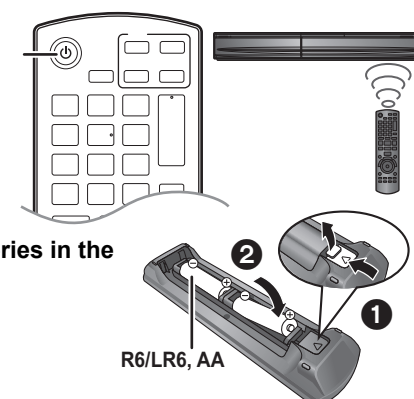

4 The Smart setup starts

The on screen display will guide you through the steps.*3



Press [◀, ▶] to select [Yes].

*3 If you want to restart the Smart setup: Refer to "STEP 5: Smart setup / Easy setup" in the operating instructions.